

12 Series


1230

1240

Equipped with Fornito con

- > Triplex pump with ceramic plungers, connecting rod system
- > Automatic by-pass valve
- > Pressure adjustment built-in
- > HP built-in detergent suction
- > Motor thermal protector
- > TSI with:
 - time delayed auto stop/start
 - stop for leak detention
 - stop for lack of water
 - stop for motor overloading
 - system error warning light
- > 5m electric cable
- > Gun, lance w/ nozzle head

- > Pompa a 3 pistoni in ceramica, con sistema biella-manovella
- > Valvola di by-pass automatica
- > Regolazione pressione
- > Aspirazione detergente incorporata in alta pressione
- > Motore elettrico con protezione termica
- > TSI con:
 - total stop temporizzato
 - arresto per microperdite
 - arresto per mancanza d'acqua
 - arresto per surriscaldamento motore
 - segnalazione d'errore tramite spia intermittente
- > Cavo elettrico: 5m
- > Pistola, testina portaugello e lancia

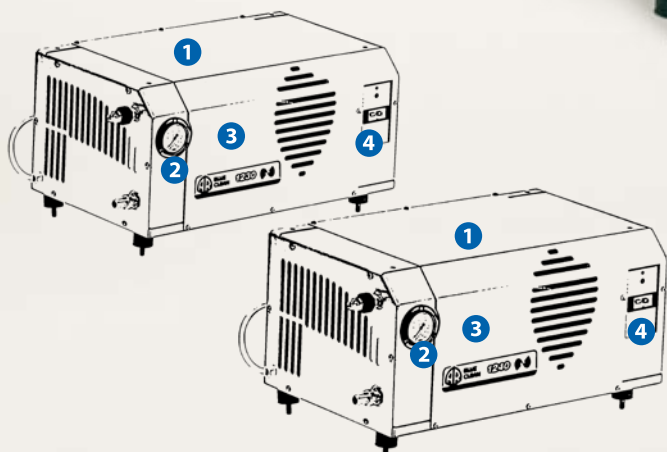

1 Stainless steel cover
Carter in acciaio inox

2 Pressure gauge
Manometro

3 Adjustable pressure
Pressione regolabile

4 Thermal switch protector
Interruttore con protezione termica

Standard Equipment Accessori Standard


MV880 w/ extension

Gun w/lance · Pistola con prolunga
(50245)



Lance

Lancia
(50246)



Wash Nozzles


Ugello 1/4 MEG
1230 (3091) - 25045
1240 (3087) - 2504



Optional Accessories Accessori Opzionali

Sandblast Pro

Sandblasting kit
Kit sabbiante
1230 (3053)
1240 (3052)

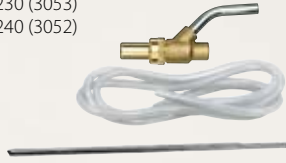

Rotopower Pro

Turbo nozzle head
Ugello rotante
1230 (40699)
1240 (40700)



Rotating Brush

Spazzola rotante
(40606)



RE150 · RE170 · RE200

Lance · Lancia
RE150 (40654) · RE170 (40694)
RE200 (40695)



HP hose 10m antimacchia

Tube HP 10m (SAE100 R1)
(50258)



AV

Hose reel, w/out hose · Avvolgitubo,
fornito senza tubo
(50264)
Stand · Staffa (50270)



WS

Stainless steel wall stand · Supporto a
parete in inox
(50265)



Pipe Jet

Pipe drain nozzle
Ugello pulizia tubazioni
(50251)



PD

Pressure accumulator
Polmone accumulatore
(50046)



TDV

Roller nozzle
Testina doppio ugello
(3025)



Detergent chemicals

Car · Auto
(40613) 24 units
Motorbikes · Motociclette
(40614) 24 units
Boat · Barche
(40615) 24 units
Universal · Universale
(40616) 24 units



Sand (5kg)

Calibrated and filtered sand
Sabbia calibrata e filtrata
(3207)



Sigillante

H.P. connection sealing
Frenaflessi sigillante per raccordi
(40693)



MV 880

Gun · Pistola
(40698)



FS

Stainless steel floor stand · Supporto a
banco in inox
(50266)



Technical Data

Dati Tecnici

Code

Codice	
1230	22377
1240	22378

Max Pressure

Pressione Massima

>	bar	psi
1230	150	2200
1240	200	2900

Flow Rate

Portata

>	lt/h	gph
1230	900	238
1240	900	238

Power

Potenza

>	Output kw	Input (absorbed) kw
1230	4	6,6
1240	5,5	9

IPX4-S1

rpm 1450 – 3~ 50 Hz – V 400

On request · A richiesta

1750 rpm · 3~60 Hz 230/400 V

Max inlet water temperature Temperatura massima acqua

>	°C	°F
1230:1240	60	140

Logistical Data

Grandezze logistiche

Weight

Peso

>	kg
1230	72
1240	75

Outer dimensions

Dimensioni esterne

>	LxWxH (cm)
1230	40x65x33
1240	40x65x33

Packaging

Imballo

>	LxWxH (cm)
1230	53,5x88x68
1240	53,5x88x68

Quantity pallet

Quantità pallet

1230	6
1240	6

Quantity per container

Quantità per container

>	20 ft	40 ft
1230	72	144
1240	72	144

Quantity truck

Quantità camion

1230:1240	198
-----------	-----



(HXW)